



Rear View

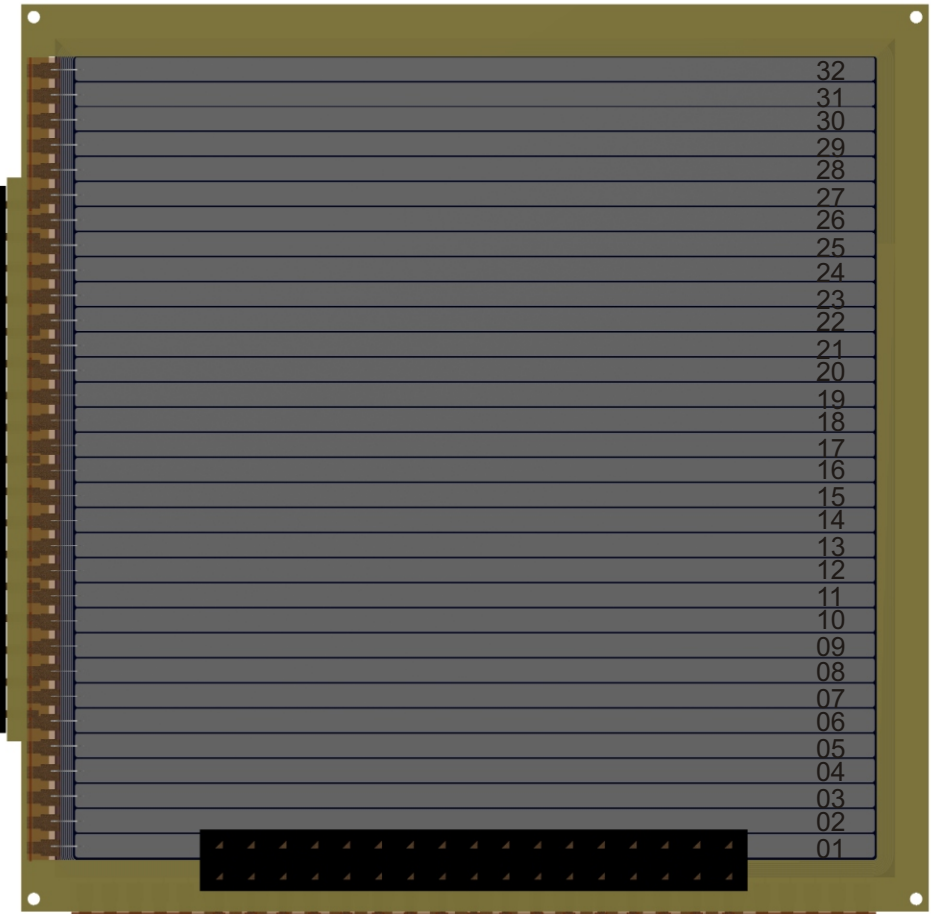

**Rear Connector Outputs**

32	■	N/C
30	■	31
28	■	29
26	■	27
24	■	25
22	■	23
20	■	21
18	■	19
16	■	17
14	■	15
12	■	13
10	■	11
08	■	09
06	■	07
04	■	05
02	■	03
N/C	■	01

**Front Connector Outputs**

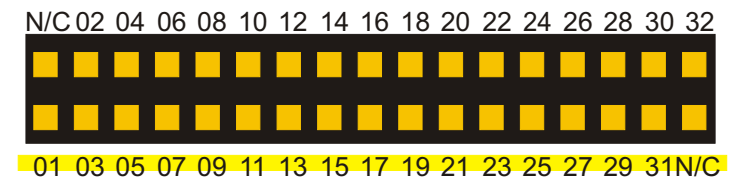

Drawn N.W Des. Appd. Customer	Checked S.W	Date 03/11/2010	Tolerances Unless Stated	Outputs Via: Samtec part number SSQ-117-22-G-D-RA
			Package O/D ± 0.1mm	Mating connector: Samtec TSW, MTSW, MTLW, LCW, EW, ZW, TSS, ZSS, TSM, TSSH ranges.
			Package Hole ± 0.05mm	Potted Wire Bonds: No
			Package Hole Pos'n ± 0.1mm	Flexi Part Numbers: A-3314 and A-3315
			Detector O/D ± 20.0µm	Substrate Material: 5mm Thick unplated FR4 PCB material
			Connector Orientation: Junction side connector to exit inside of kapton, ohmic connector to exit outside of kapton.	

Title.  
**BB7 Minimum Area Frame.  
3D Assembly.**

**MICRON SEMICONDUCTOR LIMITED**

THIS DOCUMENT IS THE PROPERTY OF  
MICRON SEMICONDUCTOR LTD AND IS  
COMMERCIAL IN CONFIDENCE

graphics@micronsemiconductor.co.uk

Scale N/A    Dims In. mm    Drg No **A-3893**